



**DIGITAL DATA 64CH MUX SERIES**  
**PRODUCT SPECIFICATION      EL –64D1402 TX / RX LINK**

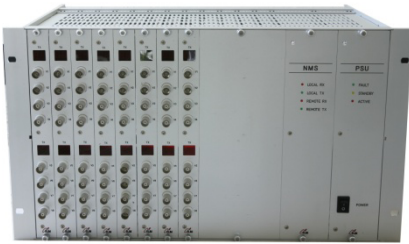

**DESCRIPTION**

The ELIM EL-64D1402 TX/RX series data transceiver supports simultaneous 64 channels of digital data transmission over a single-mode optical fiber. It is suitable for long haul transmission application without any noise or electromagnetic interference.

The modules are universally compatible with Major CCTV control data and support RS-232, RS-422 and 2-wire or 4-wire RS-485 data interfaces, as well as Sensormatic Sensornet™ and all major data protocols.

Plug-and-play design ensures ease of installation requiring no Electrical or optical adjustments. Each Transceiver incorporates status indicating LED's for monitoring of proper System operation.

**APPLICATION**

- .CCTV, ITV and traffic control System
- .CATV System
- .Security System
- .Process control and monitoring System

**FEATURES**

- . Supports RS-232, RS-422 or RS-485 ( 2 –wire or 4-wire ) Data Interfaces
- . Plug-and-Play Installation ( Adjustment-Free )
- . LED Status Indicators For Monitoring system status
- . Hot-Swappable Rack Modules
- . Automatic re-settable Fuses
- . Free voltage Power Input
- . Transmission distances up to 190 km
- . Registration of EMI/EMC, K-Mark, UL certification
- INNO-BIZ, Good Software and Venture Business

**NMS ( option )**

- . Displays local communication status.
- . Monitoring system status for each site.
- . Provides optical cable network broken-down alarm.
- . Provides system operation history and management.

**ORDERING INFORMATION**

	PART NUMBER	DESCRIPTION	OPTICAL PWR BUDGET	MAX DISTANCE
SINGLE-MODE 9/125um	EL – 64D1402 TX EL – 64D1402 RX	64ch Data Transceiver 64ch Data Transceiver	13dB	40Km
	EL – 64D1602 TX EL – 64D1602 RX	64ch Data Transceiver 64ch Data Transceiver	20dB	60Km
	EL – 64D1802 TX EL – 64D1802 RX	64ch Data Transceiver 64ch Data Transceiver	25dB	80Km