

DIGITAL 8CH VIDEO WITH BI-DIRECTIONAL 8CH DATA LINK
PRODUCT SPECIFICATION **EL -8V8D1202 TX / RX SERIES**

SPECIFICATIONS

VIDEO

Video Input: 1 volt pk-pk (75 ohms)
 Video Bandwidth: 10 Hz – 10 MHz
 Differential Gain: <0.7%
 Differential Phase: <0.7°
 Tilt: <1%
 Signal-to-Noise Rate: >67dB

DATA

Data Interface: RS-232,RS-422, RS-485
 with Tri-State
 Data Format: NRZ,RZI,Manchester, Bi-phase
 Data Rate: DC – 300Kbps(NRZ)
 Bit Error Ratio: < 1 in 10 E-9
 Operating Mode: Simplex or Full-Duplex

WAVELENGTH 1310/1550nm


OPTICAL EMITTER Laser Diode

NUMBER OF FIBER 1Core

LED INDICATORS

- Video Transmitter/ Data Transceiver
 - .Video input level
 - .Video status
 - .Received Data
 - .Transmitted Data
 - .Operating Power
- Video Receiver/ Data Transceiver
 - .Video output level
 - .Optical status
 - .Video status
 - .Received Data
 - .Transmitted Data
 - .Operating Power

SYSTEM DESIGN

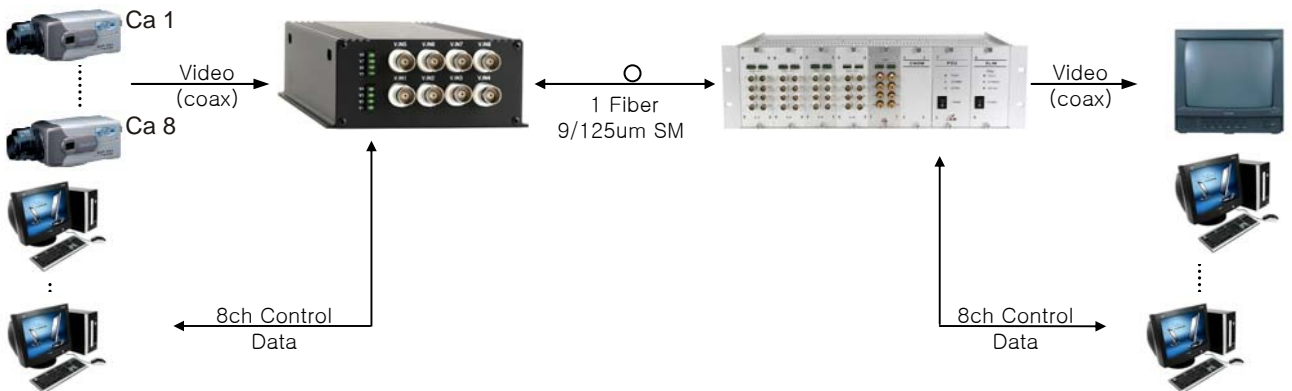

CONNECTORS

Video: BNC (Gold Plated Center-Pin)
 Data: Terminal Block with Screw Clamps,
 Type DB-9 Connector (RJ-45)
 Optical: ST or SC Connector

ELECTRICAL & MECHANICAL

Power: 12 VDC @ 300mA
 Surface Mount: From Rack
 Number of Rack Slots: 12
 Current Protection: Automatic Resettable Solid-State
 Current limiters

Size(WxHxD)

Mount Type 123 x 48 x 220mm
 3u Card Type 48 x 128 x 224mm
 6u Card Type 25 x 256 x 224mm
 2u Rack Mount 483 x 88 x 330mm
 3u Rack Mount 483 x 132 x 290mm
 6u Rack Mount 483 x 264 x 290mm

ENVIRONMENTAL

MTBF: > 100,000 hours
 Operating Temp: -40°C to +74°C
 Storage Temp: -40°C to +85°C
 Relative Humidity: 0% to 95% (non-condensing)

